

VÍTKOVICE CYLINDERS a.s.

Ruská 24/83,
706 00 Ostrava - Vítkovice
Czech Republic
Fax.: 00420/596 664 642
IČ : 25849026

**Cylinders
Holding****EU DECLARATION OF CONFORMITY No.: 201194/1**

EU PROHLÁŠENÍ O SHODĚ č.:

According to Annex IV of Directive 2014/68/EU, implemented by Czech law
No. 90/2016 and by Czech government regulation No. 219/2016.

podle přílohy IV směrnice 2014/68/EU, implementované zákonem ČR č. 90/2016 Sb. a Nařízením vlády ČR č. 219/2016 Sb.

Customer /Zákazník**FHU "OPTIMAL-BIS" DANUTA
KOSMALSKA****Contract No. /Smlouva č.**

-

Shop order No./Zakázka č.**OL201194****Product/Výrobek****Seamless steel cylinders for breathing
apparatus**

Bezešvé ocelové lahve pro dýchací přístroje

Type/Typ - Dimensions/ Rozměry**12 L – D 100/2,5 mm****Working pressure/Test pressure****230 / 345 bar**

Pracovní přetlak/ Zkušební přetlak

Quantity/ Množství**25 pcs****Production numbers /Výrobní čísla****15408726 - 15408750****Customer numbers /Zákaznická čísla**

-

Drawing No. /Výkres č.**LA 4 – 0345 rev.3****Technical standard/Technická norma****EN ISO 9809-2****Material/Materiál - Heat/Tavba = Heat code/Krycí znak tavby****34CrMo4 – 58266=BG****Test lot /Zkušební skupina****BG/1****Paint/Nátěr****RAL9010**

We declare that cylinders are in conformity with the type as described in the EC type examination certificate No. 07.537.450 and satisfy the requirements of the Directive 2014/68/EU, implemented by Czech law No. 90/2016 and by Czech government regulation No. 219/2016.

Prohlašujeme, že lahve se shodují s typem popsáním v certifikátu příslušného typu 07.537.450 a splňují požadavky směrnice 2014/68/EU implementované zákonem č. 90/2016 Sb. a NV č. 219/2016 Sb.

Conformity assessment procedure – Module: B (EC type – examination) + C1 (conformity to type)

Postup vyhodnocení shodnosti – modul : B (ES přezkoušení typu) + C1 (shodnost s typem)

The monitoring is performed by:

TŮV SŮD Czech s.r.o., Novodvorská 994, 142 21 Praha 4, Czech Republic

Dozor se provádí prostřednictvím :

Identification No.: 1017

Identifikační číslo : 1017

Enclosure : List of production numbers of supplied cylinders

Příloha : Seznam výrobních čísel dodaných lahví

All prescribed inspections and tests were carried out in accordance with the purchase contract and the above-mentioned standard and were satisfactory. The cylinders were stamped with the mark of conformity CE 1017. Všechny předepsané kontroly a zkoušky byly provedeny v souladu s kupní smlouvou a výše uvedenou normou a byly vyhovující. Lahve byly označeny značkou shody CE 1017.

V Ostravě dne: 14.10.2020

Authorized representative of producer :
Oprávněný zástupce výrobce:

Jiří Písečný

QC departement – Řízení kvality

**VÍTKOVICE CYLINDERS a.s.**

Ruská 24/83

706 00 Ostrava-Vítkovice

Order number	Customer	Cylinder type			
OL201194	FHU "OPTIMAL-BIS" DANUTA KOSMALSKA	12 L oxygen, nitrox or air			
Pieces	Test pressure	Year / Month			
25	345,00 bar	2020 / 7			

Production number	Prefix	Customer number	Testing group	Cylinder weight	Capacity
15408726			BG/1	15,0	12,0
15408727			BG/1	14,6	12,0
15408728			BG/1	15,2	12,0
15408729			BG/1	14,6	12,0
15408730			BG/1	14,8	12,0
15408731			BG/1	14,4	12,0
15408732			BG/1	14,6	12,0
15408733			BG/1	15,1	12,0
15408734			BG/1	14,8	12,0
15408735			BG/1	14,8	12,0
15408736			BG/1	14,9	12,0
15408737			BG/1	14,7	12,0
15408738			BG/1	15,1	12,0
15408739			BG/1	14,5	12,0
15408740			BG/1	15,0	12,0
15408741			BG/1	14,9	12,0
15408742			BG/1	14,7	12,0
15408743			BG/1	14,9	12,0
15408744			BG/1	15,1	12,0
15408745			BG/1	14,1	12,0
15408746			BG/1	14,6	12,0
15408747			BG/1	14,9	12,0
15408748			BG/1	14,7	12,0
15408749			BG/1	14,7	12,0
15408750			BG/1	14,7	12,0

VÍTKOVICE CYLINDERS a.s.

Ruská 24/83,
706 00 Ostrava - Vítkovice
Czech Republic
Fax: 00420/596 664 642
IČ : 25849026



Vítkovice
Cylinders

Instruction for application

(drawing LA4-0345rev3)

(order No. OL201194)


respiration apparatuses *.

These cylinders are on compressed air, oxygen and other respiration mixtures and designed as portable cylinders for the divers, firemen, persons working with asbestos and the like.

These cylinders are defined for the installation at oxygen/air facilities of the hospitals. *

Description of stamping

(Sample)

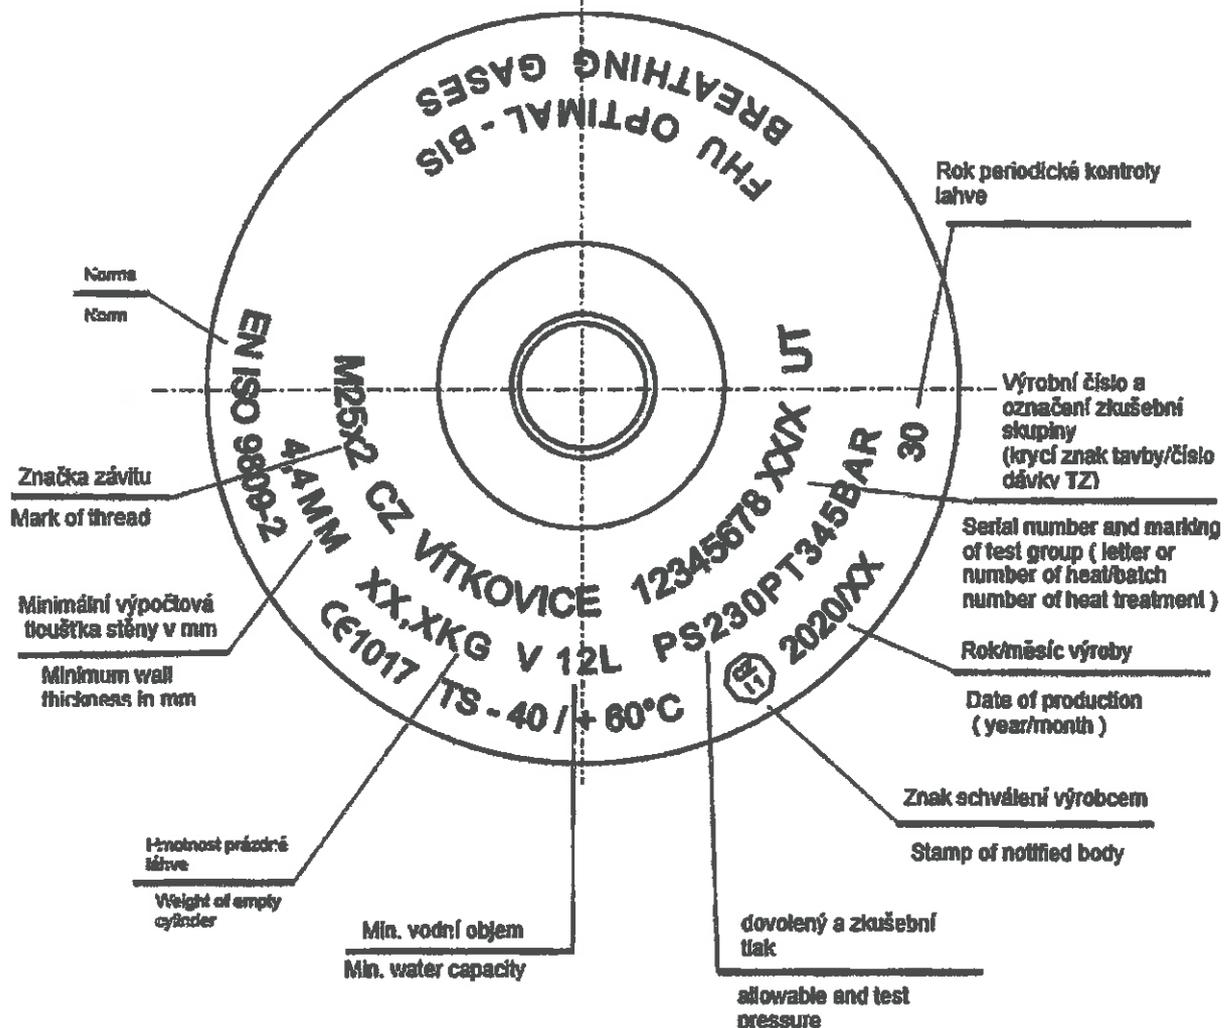

Operation Instructions

Maximal working overpressure in bar at steady temperature 15 °C is stated in stamping (PS).

The cylinder can be operated only in the range of temperatures: low temperature-stated in stamping , upper temperature +60°C for entirely filled cylinder and in other cases it is such that at certain level of cylinder filling pressure shall not exceed value 0,75 x testing pressure (PT).

VÍTKOVICE CYLINDERS a.s.

Ruská 24/83,
706 00 Ostrava - Vítkovice
Czech Republic
Fax: 00420/596 664 642
IČ : 25849026

**Vítkovice
Cylinders**

The cylinders shall be stored, handled and used in a way to prevent from :

- their damage and change of shape that can result in safety reduction (scratches, dead holes and the like.)
- temperature exceed of cylinder and its medium above 60 °C for entirely filled cylinder
- formation of excessive surface or pitting corrosion, rusting or contamination of inside surface

Application

The cylinders can be used exclusively for the medium stated in stamping

The cylinders can be filled only by the authorized organization-assigned with the applicable regulations and in compliance with the applicable technical instructions and standards.

Repairs with welding, material heating of cylinders without medium above 300 °C, any interventions in cylinders construction, not approved changes in stamping are strictly forbidden.

Maintenance and inspection

The cylinders shall be subject to inspections in periods assigned in the applicable instructions and standards. The inspection shall be done only by authorized inspector.

In case of damage of cylinder surface (scratches, tears, deformations, excessive surface corrosion, pitting corrosion and the like) or cylinder exposure to influences that could deteriorate its material properties or damage the cylinder (exposure to temperature above 300 °C, internal overpressure higher than testing pressure (PT) for more than 3 % and so on) the cylinder shall be subject to not planned inspection and proceed further according to the inspector's decision.

The cylinders that do not satisfy shall not be in operation. The cylinders defined for disposal shall be physically scrapped. The cylinder material (low-alloy steel) is completely recycled, for ex. through the scrap yards. The cylinders can be also returned for disposal to the producer.

*Note.: * Respiration apparatus is a personal protective means and so it shall be carried and kept by the individual.*

Prepared by:

Jan ŠIGUT

VÍTKOVICE CYLINDERS a.s.

Date: 31.07.2020

Approved by:

Ing. Aleš MUSIAL

VÍTKOVICE CYLINDERS a.s.

050.30- Products and tooling development and Automotive

Date: 31.07.2020

VÍTKOVICE CYLINDERS a.s.**Ruská 24/83****706 00 Ostrava-Vítkovice****(2/1)**